


- 6-Pen Multipoint
- Roll or Z-fold chart
- Analogue display with high trace visibility
- Pre-configured, Universal, Isolated inputs
- PC configuration
- Annotation
- 236 mm overall depth behind panel
- Front access to pen zero/span adjust
- Up to 12 relay outputs
- Ready for immediate use.

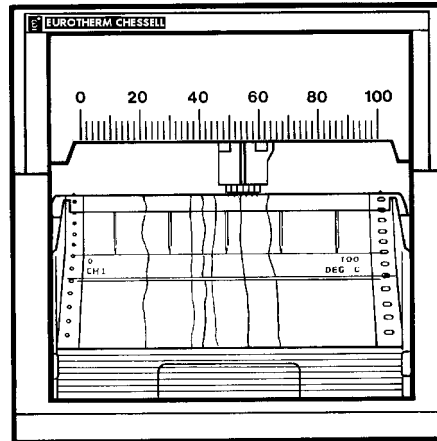

The 4101M is a low specification multipoint recorder, capable of plotting up to six input signals. Enclosed in a sheet steel case designed to meet the requirements of an industrial environment, the recorder is ideal for production or test purposes.

Display

The 4101M has an analogue scale, with the current process value being indicated on a 0 to 100% scale, by a pointer on the printhead carriage. This, together with the unimpeded view given by the special door design gives high visibility to the traces and their current values.

Input technology

Use of the very latest in Application Specific Integrated Circuit (ASIC) and Surface Mount technologies, gives the 4101 input circuitry high accuracy and stability. Inputs are fully universal accepting inputs from thermocouples, resistance thermometers and potentiometers.

Configuration

The recorder comes pre-configured to the requirements specified at time of order, but the inputs etc. can be fully reconfigured using a DOS-based package, should requirements change.

Annotation

The 4101M has annotation as standard, providing printing on the chart of scale end-points, units, time and chart speed, thus avoiding the necessity for expensive, specially printed charts.

Chart Illumination

This option provides a fluorescent tube above the chart, making the traces significantly more visible, even in well lighted areas.

Small rear panel depth

The 4101M has a total depth behind panel of 236mm allowing it to fit easily into the standard range of 250mm deep panels.

Front access to adjustments

A pair of push-button switches, accessible when the recorder door is opened, allows the user to change chart speed and alarm thresholds, to park the printhead for chart/printhead replacement, and to adjust the pens to the chart zero and span.

Relay Outputs

Two alarm thresholds can be set up for each channel. With the relay output option fitted, these alarms are each assigned a relay which becomes de-energised when the current value lies above the high threshold or below the low threshold.

Three types of relay board are available:

3 x changeover, 4 x common/normally closed and 4 x common/normally open.

TECHNICAL SPECIFICATION (Input board)

General

| | |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input types | DC Volts, dc millivolts, DC milliamps, Thermocouple, 2 / 3-wire RTD (Channel 1 can be RTD only if no other channels are thermocouple) |
| Input type mix | As specified at time of order |
| Maximum number of inputs | 6 |
| Input ranges | - 30 to + 150 mV; - 0.2 to + 1 Volt; - 2 to + 10 Volts |
| Termination | Edge connector / terminal block |
| Noise rejection (48 to 62 Hz) | Common mode: >140dB (channel to channel and channel to ground). Series mode: >60dB. |
| Maximum common mode voltage | 250 Volts continuous |
| Maximum series mode voltage | 180 mV at lowest range; 12 Volts peak at highest range. |
| Isolation (dc to 65 Hz; BS EN61010) | Installation cat.II; Pollution degree 2 |
| Channel to channel: | 300V RMS or dc (double insulation) |
| Channel to common electronics: | 300V RMS or dc (double insulation) |
| Channel to ground: | 300V RMS or dc (basic insulation) |
| Dielectric strength (BS EN61010) | (One minute type tests) |
| Channel to channel: | 2300 Vac |
| Channel to ground: | 1350 Vac |
| Insulation resistance | >10 M Ω at 500 V dc |
| Input impedance | 150 mV and 1 V ranges: >10 M Ω ; 10 V range: 68.8 k Ω |
| Over voltage protection | 50 Volts peak (150V with attenuator) |
| Open circuit detection | \pm 57 nA max. |
| Recognition time | 500 msec |
| Minimum break resistance | 10 M Ω |

DC Input ranges

| | |
|------------------------------------|-------------------------------------|
| Shunt/attenuator | Externally mounted resistor modules |
| Additional error due to shunt | 0.1% of input |
| Additional error due to attenuator | 0.2% of input |
| Performance | See table 1 |

| Low Range | High Range | Resolution | Maximum error (Instrument at 20°C) | Worst case temperature performance |
|-----------|------------|-------------|------------------------------------|------------------------------------|
| -30 mV | 150mV | 5.5 μ V | 0.084% input + 0.053% range | 80ppm of input per deg C |
| -0.2 Volt | 1 Volt | 37 μ V | 0.084% input + 0.037% range | 80ppm of input per deg C |
| -2 Volts | 10 Volts | 370 μ V | 0.275% input + 0.040% range | 272ppm of input per deg C |

Table 1 DC performance

Input board specification (Cont.)

Thermocouple data

| | |
|---------------------------|----------------------------------------------------------|
| Temperature scale | ITS 90 |
| Linearisation accuracy | 0.05% of user selected span |
| Bias current | 0.05 nA |
| Cold junction types | Off, internal, external (as defined at time of order) |
| CJ error | 1°C max; instrument at 25°C |
| CJ rejection ratio | 50:1 minimum |
| Upscale / downscale drive | High, low or none as specified at time of order. |
| Types and ranges | See table 2 |

| T/C Type | Overall range (°C) | Standard |
|----------|--------------------|------------------------------|
| B | 0 to + 1820 | IEC 584.1 |
| C | 0 to + 2300 | Hoskins |
| D | 0 to + 2495 | Hoskins |
| E | - 270 to + 1000 | IEC 584.1 |
| G2 | 0 to + 2315 | Hoskins |
| J | - 210 to + 1200 | IEC 584.1 |
| K | - 270 to + 1372 | IEC 584.1 |
| L | - 200 to + 900 | DIN43700:1985 (To IPTS68) |
| N | - 270 to + 1300 | IEC 584.1 |
| R | - 50 to + 1768 | IEC 584.1 |
| S | - 50 to + 1768 | IEC 584.1 |
| T | - 270 to + 400 | IEC 584.1 |
| U | - 200 to + 600 | DIN 43710:1985 |
| Ni/NiMo | 0 to + 1406 | Ipsen |
| Platinel | 0 to + 1370 | Engelhard |

Table 2 Thermocouple types and ranges

Resistance inputs

| | |
|------------------------------------|------------------------------------------------------|
| Ranges (including lead resistance) | 0 to 600 Ω , 0 to 6k Ω |
| Linearisation accuracy | 0.05% of user entered span |
| Influence of lead resistance | Error = negligible; Mismatch = 1 Ω / Ω |
| Temperature scale | ITS90 |
| Resolution and performance | See table 3 |
| RTD types and ranges | See table 4 |

| Low Range | High Range | Resolution | Maximum error (Instrument at 20°C) | Worst case temperature performance |
|------------|---------------|---------------|------------------------------------|------------------------------------|
| 0 Ω | 600 Ω | 22m Ω | 0.045% input + 0.065% range | 35ppm of input per deg C |
| 0 Ω | 6000 Ω | 148m Ω | 0.049% input + 0.035% range | 35ppm of input per deg C |

Table 3 Resolution and performance for resistance inputs

| RTD Type | Overall range (°C) | Standard |
|----------|--------------------|------------------------|
| JPT100 | -220 to + 630 | JIS C1604:1989 |
| Ni100 | - 60 to + 250 | DIN43760:1987 |
| Ni120 | - 50 to + 170 | DIN43760:1987 |
| Pt100 | -200 to + 850 | IEC 751 |
| Pt100A | -200 to + 600 | Eurotherm Recorders SA |
| Pt1000 | -200 to + 850 | IEC 751 |

Table 4 RTD types and ranges

INSTALLATION CATEGORY II

The rated impulse voltage for equipment on nominal 230V mains is 2500V.

POLLUTION DEGREE 2

Normally, only non-conductive pollution occurs. Occasionally, however, a temporary conductivity caused by condensation shall be expected.

TECHNICAL SPECIFICATION (Recorder)

Board types

| | |
|----------|-----------------------------------|
| Standard | Universal input / control board |
| Options | 3- Change-over relay output board |
| | 4 Normally open relay o/p board |
| | 4 Normally closed relay o/p board |
| | Transmitter power supply |
| | Event input board |

Environmental Performance

| | |
|----------------------------------|------------------------------------------------------------------------|
| Temperature limits | Operation: 0 to 50°C. Storage: -20 to + 70°C |
| Humidity limits (non-condensing) | Operation: 5% to 80% RH Storage: 5% to 90% RH |
| Protection | Door and Bezel: IP54. Sleeve: IP20 Transmitter PSU rear cover: IP10 |
| Shock | BS EN61010 |
| Vibration | 2g peak at 10 Hz to 150Hz |
| Altitude (max.) | <2000 metres |

Electromagnetic compatibility (EMC)

| | |
|-------------------|-------------------------------------------------------------|
| Emissions | BS EN50081-2 |
| Immunity | BS EN50082-2 |
| Electrical safety | To EN61010: Installation category II; Pollution degree 2 |

Physical

| | |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Panel mounting | DIN43700 |
| Bezel size | 144 x 144 mm. |
| Panel cutout dimensions | 138 x 138 (both - 0 + 1 mm) |
| Depth behind bezel rear face | 220 mm (No terminal cover); 236 mm (standard terminal cover) 275 mm (long terminal cover closed) 390mm (long terminal cover open) |
| Weight | < 3.5kg |
| Panel mounting | Vertical ± 30° |

Printing system

| | |
|----------------------|--------------------------------------|
| Pen type | Six-nib cartridge |
| Pen resolution | 0.2 mm |
| Trace colours | See table 5 |
| Pen life | 1.5 x10 ⁶ dots per colour |
| Update rate | 2 Hz |
| Print rate (maximum) | 1 pass every 5 seconds |
| Characters per line | 42 |

| Channel | Colour | Channel | Colour |
|---------|--------|---------|--------|
| 1 | violet | 4 | green |
| 2 | red | 5 | blue |
| 3 | black | 6 | brown |

Table 5 Trace colours

Recorder Specification (Cont.)

Paper transport

| | |
|--------------------|---------------------------------------------------------|
| Type | Stepper motor driving sprocket tube |
| Chart speeds | One range from table 6 below |
| Chart type | Standard: 16 - metre z-fold Option: 32 - metre roll. |
| Transport accuracy | 0.5 cm in 16 metres (approx. 0.03%) |

| Range | Speed (mm/hr) | | | | |
|-------|---------------|----|----|----|-----|
| | 1 | 2 | 3 | 4 | 5 |
| 1 | Off | 5 | 20 | 60 | 120 |
| 2 | Off | 10 | 20 | 60 | 120 |
| 3 | Off | 10 | 30 | 60 | 120 |
| 4 | Off | 20 | 30 | 60 | 120 |

Table 6 Chart speed ranges

Power requirements

| | |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Line voltage | Standard: 90 to 264V at 45 to 65 Hz Enhanced interrupt protection: 90 to 132V at 45 to 65 Hz Low voltage option: 20 to 53V ac/dc (ac frequency range: 45 to 400 Hz) |
| Power (Max) | < 100 VA |
| Fuse type | None |
| Interrupt protection | Standard: 40 ms at 75% max. instrument load Enhanced: 120ms at 75% max. instrument load |

TECHNICAL SPECIFICATION (Options)

All isolation figures are Installation category II and Pollution degree 2

Relay outputs


| | |
|------------------------------------|------------------------------------------------------------------------------------------------|
| Maximum switching power* | 500VA or 60W |
| Maximum breaking current* | 2 Amps within above power ratings |
| Maximum contact voltage* | 250V within above power ratings |
| Isolation (dc to 65Hz; BS EN61010) | 300V RMS or dc contact-contact (double insulation) and contact to ground (basic insulation) |
| Estimated life* | 30,000,000 operations |

* With resistive loads.

With inductive loads, derate according to the graph, in which:

contact life = resistive life x F1 or F2;
F1 = measured on representative examples

F2 = typical values according to experience.




Event inputs

| | |
|------------------------------------|------------------------------------|
| Isolation (dc to 65Hz; BS EN61010) | |
| Event input to ground: | 100V RMS or dc (double insulation) |
| Event input to Event input: | 0V |


Transmitter Power Supply

| | |
|------------------------------------|------------------------------------|
| Output voltage | 3 or 6 x 25V (nom) outputs |
| Isolation (dc to 65Hz; BS EN61010) | |
| Channel to channel: | 100V RMS or dc (double insulation) |
| Channel to ground: | 100V RMS or dc (basic insulation) |
| Cover rating | IP10 |

Mechanical installation

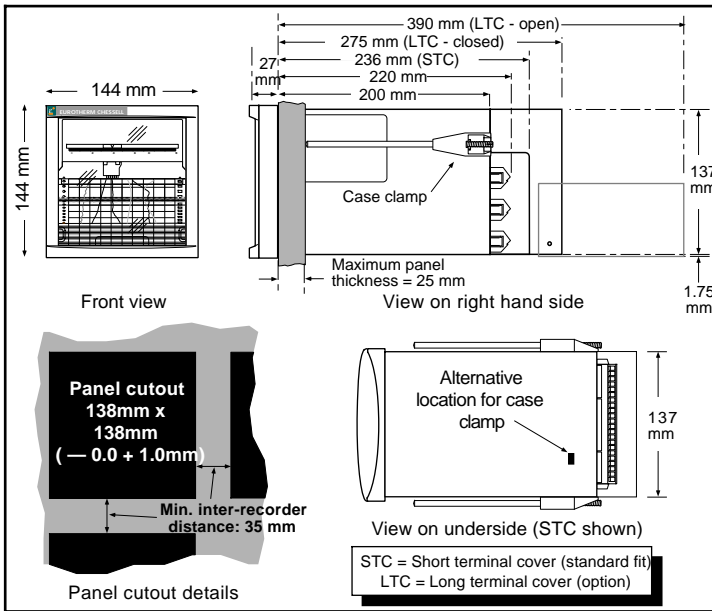


Supply voltage and input board termination

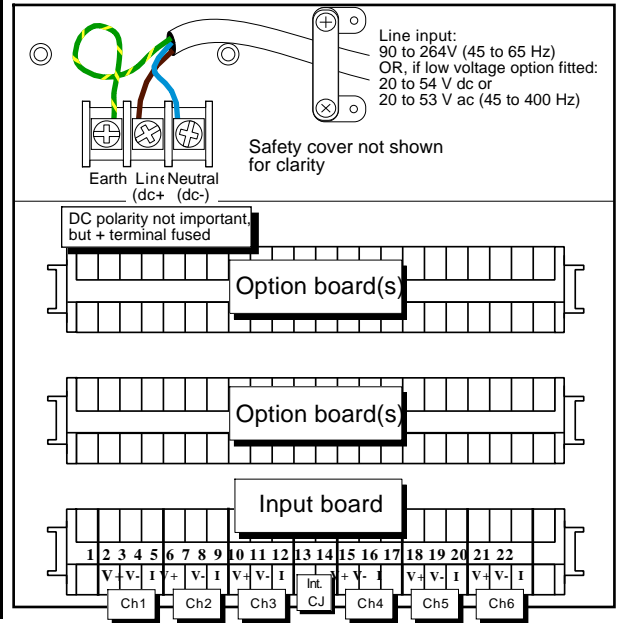


If ch1 = RTD, both legs of the internal CJ sensor are wired to terminal 11


Input board signal wiring

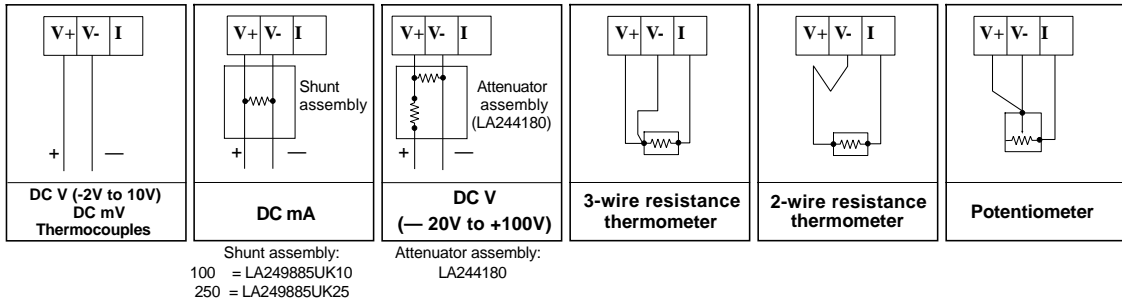


Option wiring

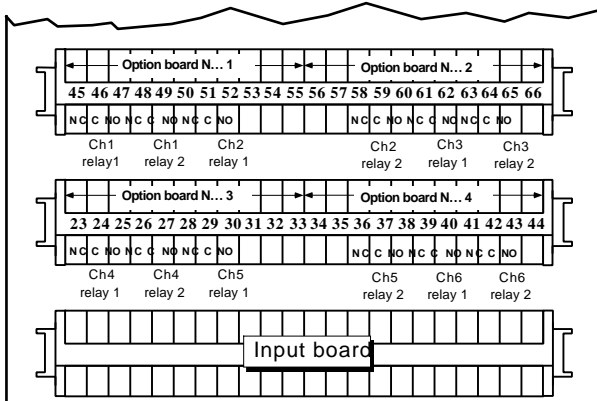


3 Changeover relays option

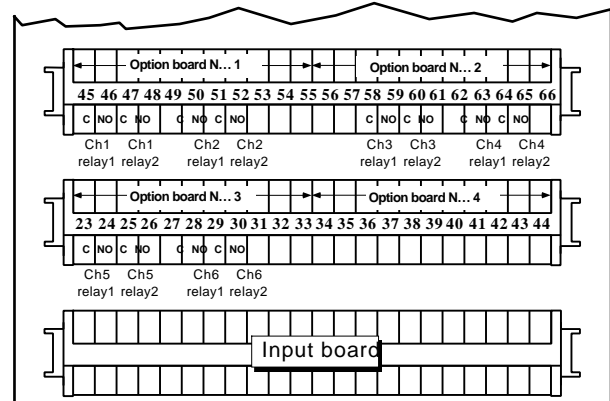

4 normally open relays option

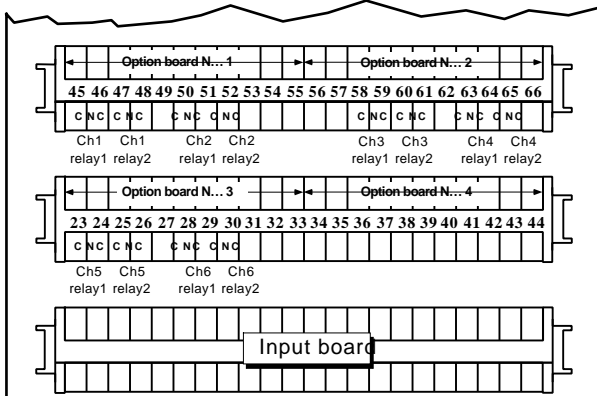

4 normally closed relays option

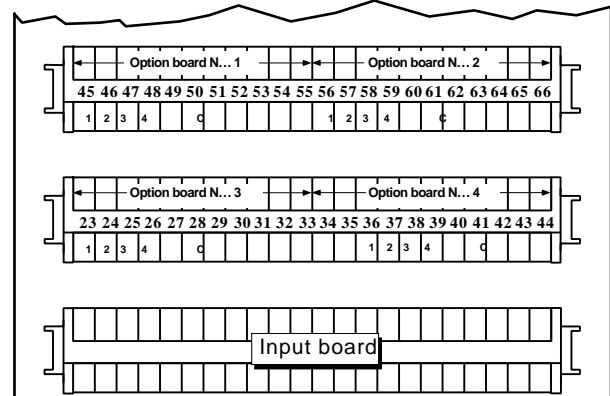

Event input board option (alternative locations)